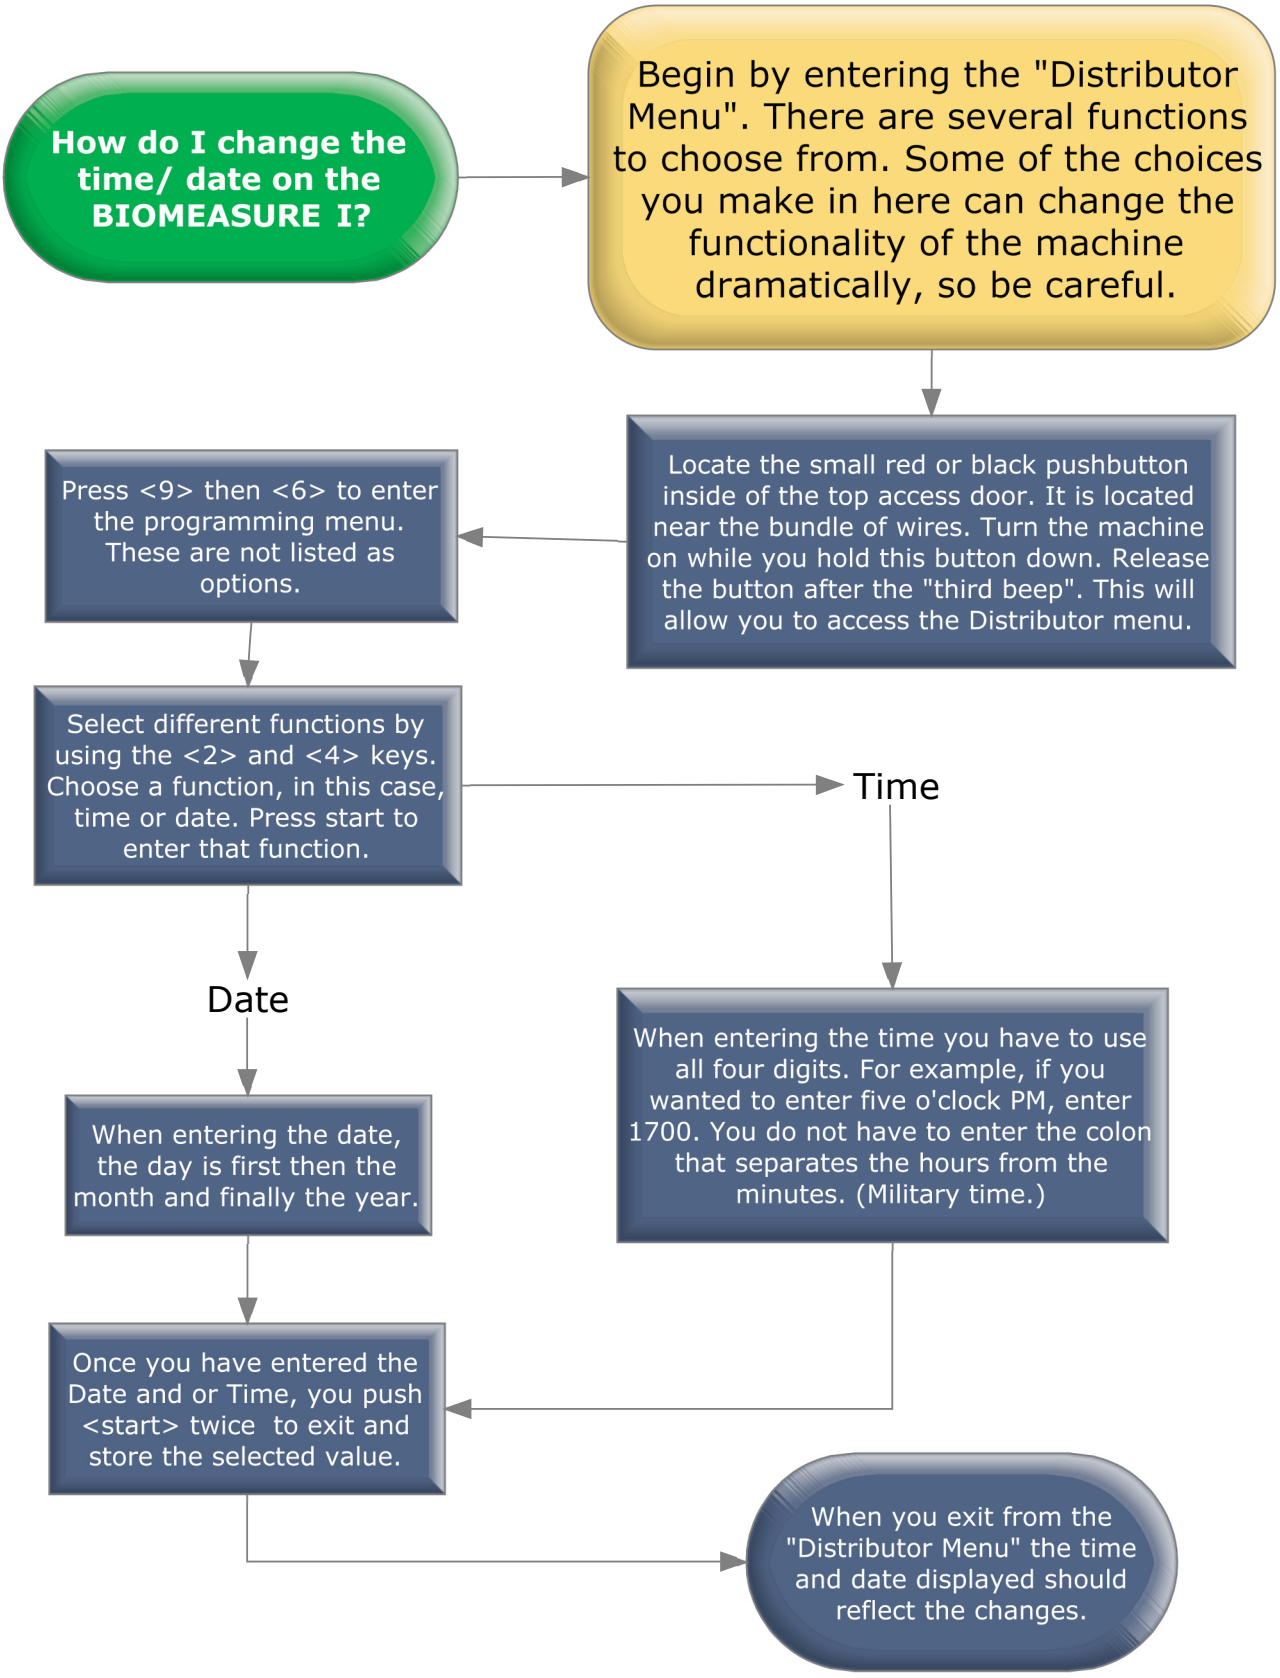
How do I change the time/ date on the BIOMEASURE I?
Begin by entering the "Distributor Menu". There are several functions to choose from. Some of the choices you make in here can change the functionality of the machine dramatically, so be careful.
Locate the small red or black pushbutton inside of the top access door. It is located near the bundle of wires. Turn the machine on while you hold this button down. Release the button after the "third beep". This will allow you to access the Distributor menu.
Press <9> then <6> to enter the programming menu. These are not listed as options.
Select different functions by using the <2> and <4> keys. Choose a function, in this case, time or date. Press start to enter that function.
Time
Date
When entering the time you have to use all four digits. For example, if you wanted to enter five o'clock PM, enter 1700. You do not have to enter the colon that separates the hours from the minutes. (Military time.)
When entering the date, the day is first then the month and finally the year.
Once you have entered the Date and or Time, you push <start> twice to exit and store the selected value.
When you exit from the "Distributor Menu" the time and date displayed should reflect the changes.