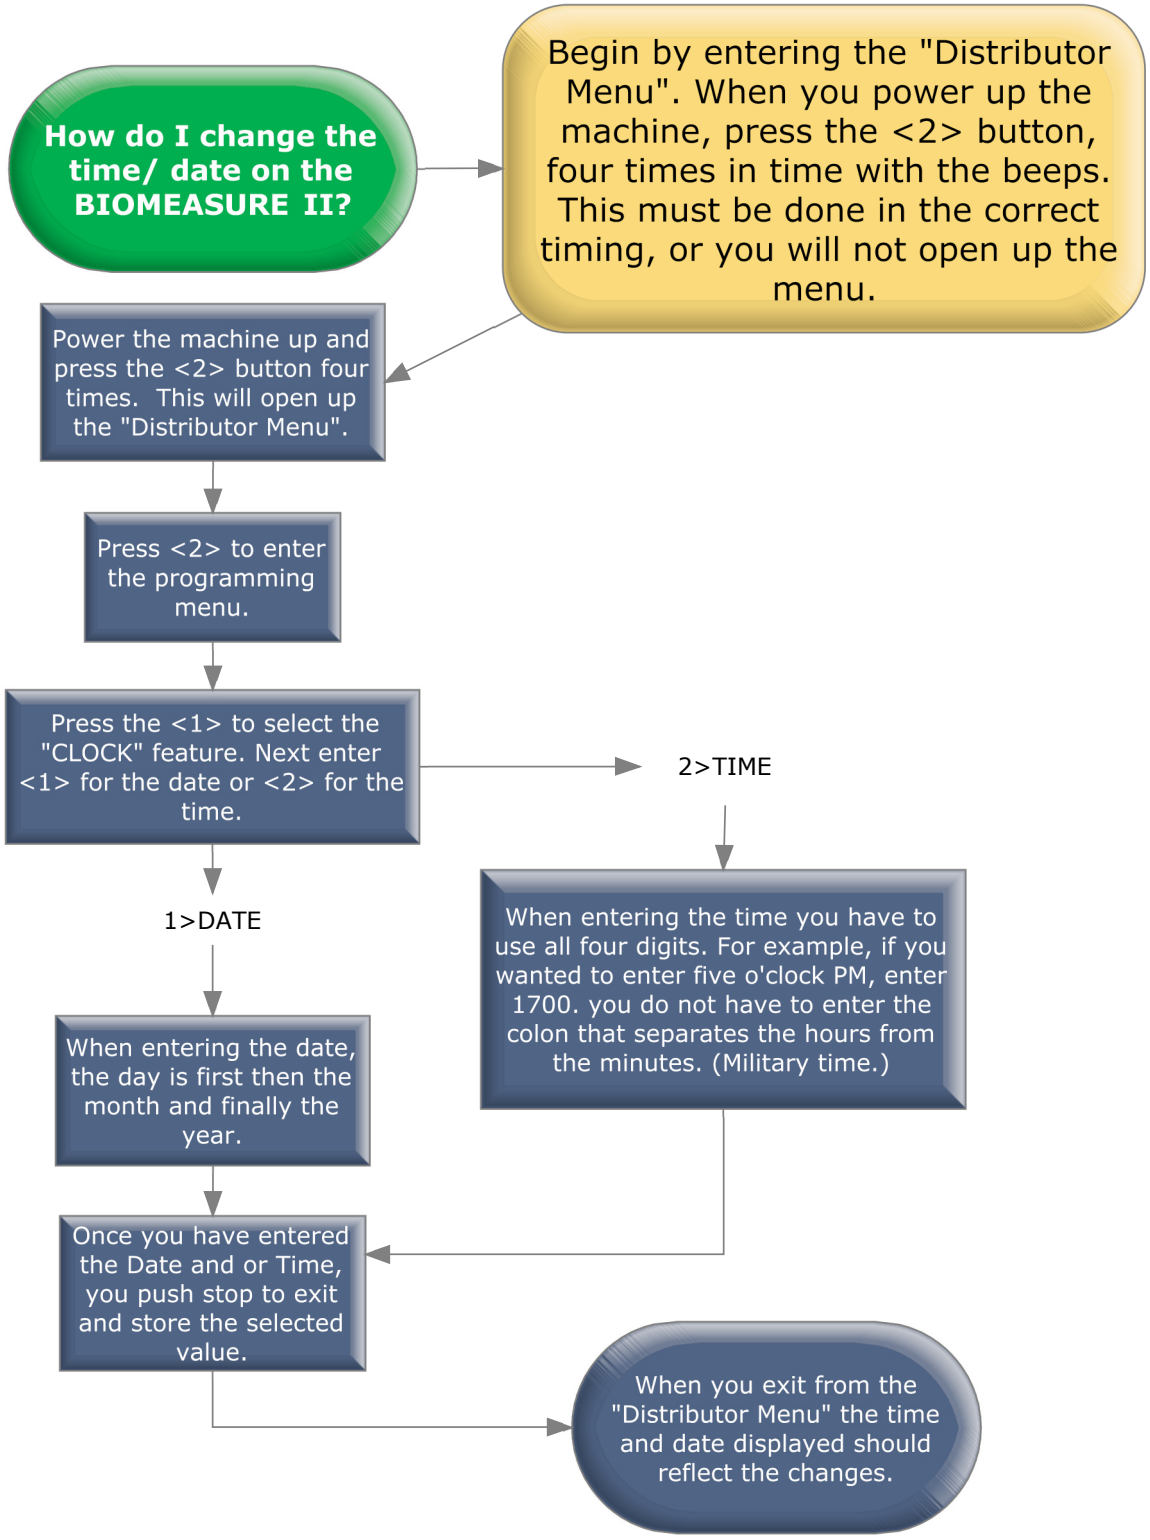
How do I change the time/ date on the BIOMEASURE II?
Begin by entering the "Distributor Menu". When you power up the machine, press the <2> button, four times in time with the beeps. This must be done in the correct timing, or you will not open up the menu.
Power the machine up and press the <2> button four times. This will open up the "Distributor Menu".
Press <2> to enter the programming menu.
Press the <1> to select the "CLOCK" feature. Next enter <1> for the date or <2> for the time.
2>TIME
1>DATE
When entering the time you have to use all four digits. For example, if you wanted to enter five o'clock PM, enter 1700. you do not have to enter the colon that separates the hours from the minutes. (Military time.)
When entering the date, the day is first then the month and finally the year.
Once you have entered the Date and or Time, you push stop to exit and store the selected value.
When you exit from the "Distributor Menu" the time and date displayed should reflect the changes.